

GAVR-15A

Universal 15 Amp 1/2 Wave Self Excited Dip-Switch Programmable Automatic Voltage Regulator

Features

- $\pm 0.5\%$ Regulation
- 220/400 VAC Programmable Input
- Rugged Compact Design
- With Under Frequency Protection
- Soft Start Voltage Ramping
- EMI Suppression
- Built-in High Capacity 15Amp Fuse



Specifications

Sensing Input	Voltage 220/400VAC, 1phase2wire	Voltage Build-up	Residual volts at AVR terminal > 5VAC
Power Input	Voltage 180~240VAC, 1phase2wire	External Volts Adjustment	$\pm 7\%$ with 1K Ω 1watt trimmer
Output	Voltage Max. 90VDC @ 240VAC input	Soft Start Ramp Time	3sec.
	Current Continuous 6A	Unit Power Dissipation	Max. 8Watt
	Intermittent 12A for 10SEE.	EMI Suppression	Internal Electromagnetic Interference Filtering
Resistance	Min. 10 Ω Max. 100 Ω	Thermal Drift	0.05% per $^{\circ}\text{C}$ change in AVR ambient
		Under Frequency Protection (Factory Settings)	60Hz system presets knee point at 57Hz 50Hz system presets knee point at 47Hz

Volts Regulation $\pm 0.5\%$ (with 4% engine governing)

Environment


Vibration 3G @ 100~2K Hz

Relative Humidity <math>< 95\%</math>

Operating Temperature -40~65 $^{\circ}\text{C}$

Storage Temperature -40~85 $^{\circ}\text{C}$

Mechanical Specifications

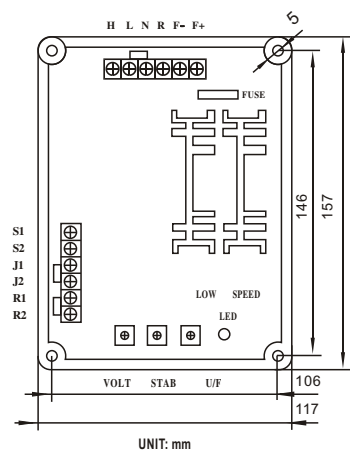

AVR Controls

- VOLTS Voltage Adjustment
- STAB Stability Adjustment
- U/F To Set the U/F * Knee Point
- *U/F: Under Frequency Protection

Physical Specifications

Dimensions 157.0(L) 117.0(W) 70.0(H) mm

